


Valves for Carbon Dioxide

Puncture type valves

Product Features

- Valve is fitted to a 'puncturing' device generally operated by solenoid valves which gets its signal from control panel of the automatic fire control system to pierce rupture disc to release the contents of the cylinder in case of fire.
- Valves threaded 1-1/4" BS Con-16 tpi - (internal).
- Valve can also be provided with external thread on valve body for fitment of 'puncturing' device.
- Valve tapped 3/8 BSP for dip tube connection.

Series : FSV-08

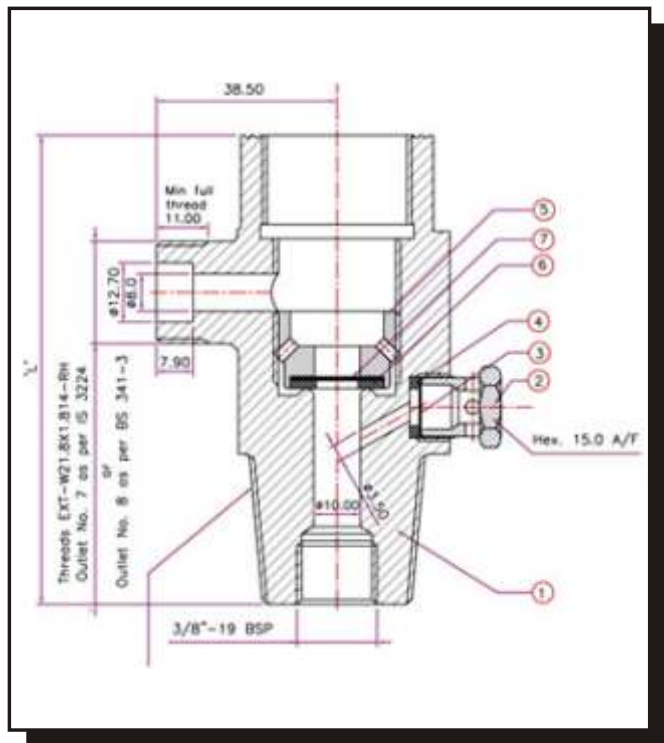

Material of Construction

Item No	Description	Material
1	Valve body-forged	BS:218 (Modified) as per IS 8737
2	Retainer plug	Free cutting brass to IS 319 (Grade 1)
3	Safety disc	Copper C101
4	Safety disc washer	Nylon 66
5	Rupture disc holder	Free cutting brass to IS 319 (Grade 1)
6	Soft seating	Hylam
7	Rupture disc	Copper C 101